

## LOW PROFILE PANCAKE HEAD



• A medium duty metal to metal screw with a large flat surface under the head, making it ideal for fixing thinner sheet material when a flush finish is required.



## FEATURES

- Large head Ø for increased clamping.
- Coarse 60° self tapping thread for extreme grip & excellent pull out.
- Silver Ruspert plated to withstand over 500 hours salt spray test.
- Phillips No2 recess for a positive drive.
- Driver bit included.
- Full batch traceability.
- Conforms to BS EN 10666 (DIN 7504)

## PRODUCT RANGE

EXTERIOR

Product Code	Size Ø x Length (mm) d <sub>p</sub> x L	Driver Bit Size	Max Drill Thickness (mm)
--------------	--	-----------------	--------------------------

Information also applies to other packaging options.			
FP19	5.5 x 19	No.2	5
FP26	5.5 x 26	No.2	5

## PERFORMANCE DATA

Steel Gauge - Grade S275JR Steel Test Plate	5.0mm
Rec. Tensile Load	3.19 kN
Max. Rec. Load	319kg


All stated figures are for reference and to be used only as a guideline. The test data stated is also for reference only as this may not represent the actual figures you may achieve in the specific application.

## DIMENSIONAL DATA

Product Code	d <sub>p</sub> (mm)	L (mm)	DK (mm)	H (mm)	K (mm)	ETL (mm)
--------------	---------------------	--------	---------	--------	--------	----------

Information also applies to other packaging options.						
FP19	4.5	19	10	2	6	9.0
FP26	4.5	26	10	2	6	16.0

\*all figures stated are approximate and for reference only.

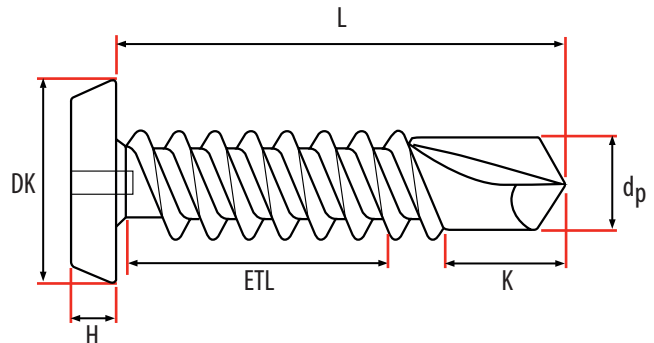

DK	Head Diameter
L	Length
H	Head Depth
d <sub>p</sub>	Drill Point Diameter
K	Drill Point
ETL	Effective Thread Length